

Irestal Group



## CARACTERÍSTICAS

**Calidades:**

AISI 304 - 304L - 316 - 316L.

**Angulos:**

Laminado en caliente decapado.

**Perfiles:**


Extrusionado en caliente decapado.

**Largos:**


4 a 6 metros.

## ANGULOS

lados iguales




A	A	E	Peso Kg/m
20	20	3	0,89
25	25	3	1,13
30	30	3	1,37
40	40	3	1,85
40	40	4	2,43
50	50	4	3,07
50	50	5	3,80
60	60	6	5,47
70	70	7	7,45
80	80	8	9,73
100	100	10	15,20



Perfil L  
lados  
desiguales




A	B	E	Peso Kg/m
30	20	4	1,47
40	20	4	1,79
50	30	5	3
60	40	6	4,51
70	50	6	5,47
80	40	6	5,47




## PERFILES


PERFIL EN 'T'



A	B	E	Peso Kg/m
20	20	3	0,90
20	20	4	1,20
30	30	3	1,37
40	40	4	2,43
50	50	5	3,80
60	60	6	5,47
80	80	8	9,73
90	90	9	12,20
100	100	10	15,10



PERFIL EN 'U'

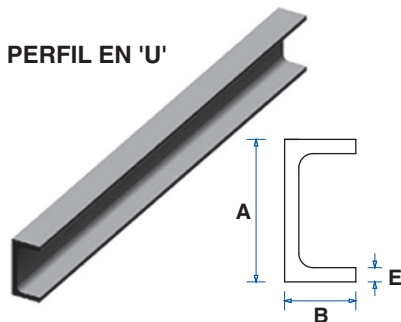


A	B	E	Peso Kg/m
30	15	4	1,78
40	20	3	1,80
40	20	4	2,30
50	25	3	2,28
50	25	5	4,20
60	30	6	5,18
80	40	4	4,90

A	B	E	Peso Kg/m
80	40	6	7,06
100	50	5	7,65
100	50	6	8,90
140	70	7	14,90
160	80	8	19,40
200	100	6	18,40
200	100	8	24,60

PERFIL EN 'H'



A	B	C	E	Peso Kg/m
100	100	6,0	10	20,4
120	120	6,5	11	28,4
140	140	7,0	12	33,4
150	150	7,0	10	31,8
160	160	10,0	13	42,9
180	180	15,0	15	62,2
200	200	8,0	12	50,4
250	250	9,0	14	72,4



Otras medidas bajo demanda.

