


ALUMINOX
Comercial **BJ** desde 1975

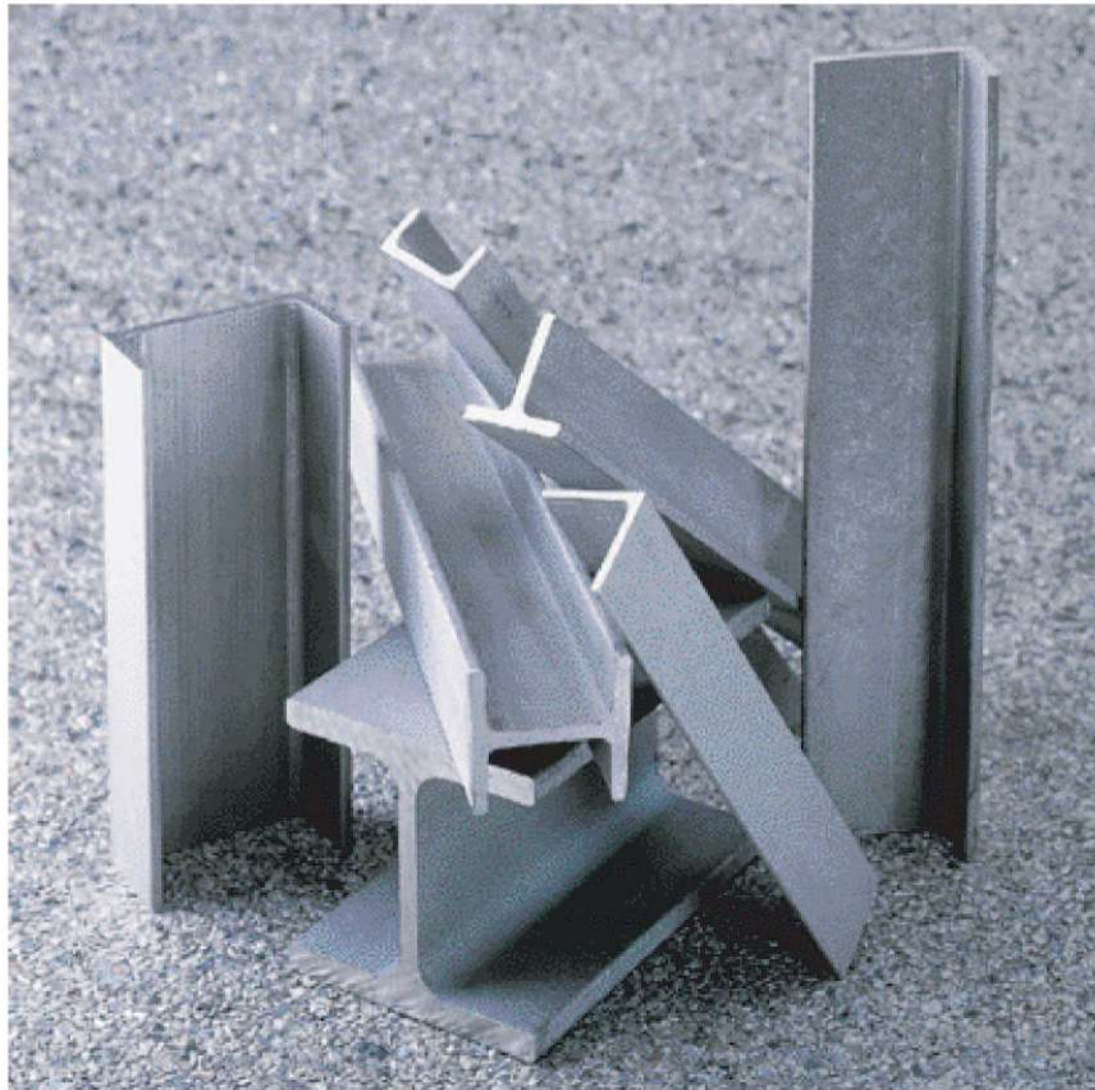

CARACTERÍSTICAS

Calidades:
AISI 304 - 304L - 316 - 316L.

Angulos:
Laminado en caliente decapado.

Perfiles:
Extrusionado en caliente decapado.

Largos:
6 metros.

ALUMINOX


Comercial **BJ** desde 1975

ANGULOS

lados iguales




A	A	E	Peso Kg/m
20	20	3	0,89
25	25	3	1,13
30	30	3	1,37
40	40	3	1,85
40	40	4	2,43
50	50	4	3,07
50	50	5	3,80
60	60	6	5,47
70	70	7	7,45
80	80	8	9,73
100	100	10	15,20



Perfil L
lados
desiguales



A	B	E	Peso Kg/m
30	20	4	1,47
40	20	4	1,79
50	30	5	3
60	40	6	4,51
70	50	6	5,47
80	40	6	5,47




PERFILES


PERFIL EN 'T'



A	B	E	Peso Kg/m
20	20	3	0,90
20	20	4	1,20
30	30	3	1,37
40	40	4	2,43
50	50	5	3,80
60	60	6	5,47
80	80	8	9,73
90	90	9	12,20
100	100	10	15,10



PERFIL EN 'U'

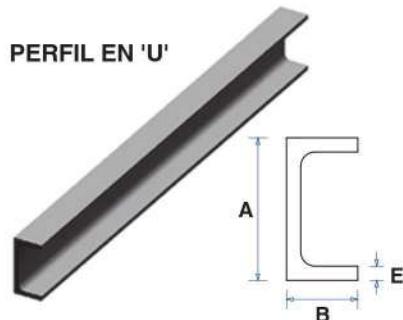

A	B	E	Peso Kg/m
30	15	4	1,78
40	20	3	1,80
40	20	4	2,30
50	25	3	2,28
50	25	5	4,20
60	30	6	5,18
80	40	4	4,90

A	B	E	Peso Kg/m
80	40	6	7,06
100	50	5	7,65
100	50	6	8,90
140	70	7	14,90
160	80	8	19,40
200	100	6	18,40
200	100	8	24,60